




# 插装阀用线圈

Coil for cartridge valve

**DC 12V  
DC 24V**

其它规格可定做  
Other can be customized

## BYC01-21-01G

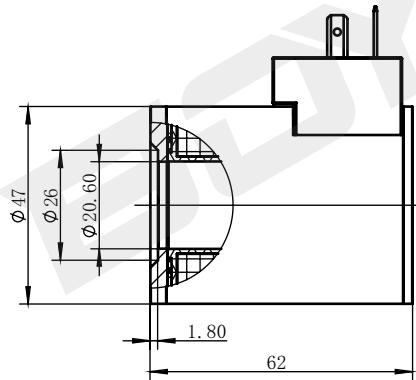

BYC

112




### 技术参数 /technical parameter

环境温度 Ambienttemperature	°C	-25 ~ 50	防护等级 Degree of protection		IP65
电压波动范围 Voltage fluctuation range	%	85 ~ 110	通电持续率 Power on duration	%	100
额定功率 Rated power	W	32	绝缘等级 Insulation class		H (180)

**DC 12V  
DC 24V**

其它规格可定做  
Other can be customized

## BYC01-21-01S

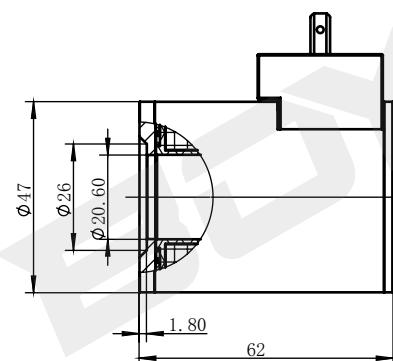

TEL:0574-86587131

www.nbboye.net

### 技术参数 /technical parameter

环境温度 Ambienttemperature	°C	-25 ~ 50	防护等级 Degree of protection		IP65
电压波动范围 Voltage fluctuation range	%	85 ~ 110	通电持续率 Power on duration	%	100
额定功率 Rated power	W	32	绝缘等级 Insulation class		H (180)

样本数据来源于试验室环境，仅供参考，贵公司如需最新数据或有特殊需求，欢迎联系搏业液压工程师。  
The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.