




BYC02-13-04D

Customizable proportions

DC 12V
DC 24V

Other can be customized






technical parameter					
Ambienttemperature	°C	-25~50	Degree of protection		IP67
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	15/20	Insulation class		H (180)

DC 24V
AC 220V

Other can be customized

BYC02-13-04G

Customizable proportions

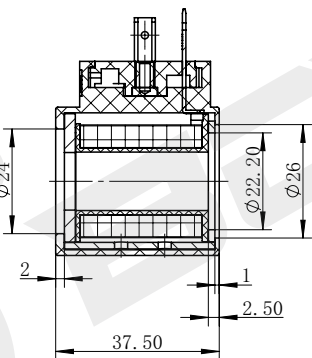

technical parameter					
Ambienttemperature	°C	-25~50	Degree of protection		IP65
Voltage fluctuation range	%	85~110	Power on duration	%	100
Rated power	W	15/20	Insulation class		H (180)