


Coil for cartridge valve

## BYC13-10-01Q

**DC 12V**

**DC 24V**

Other can be customized

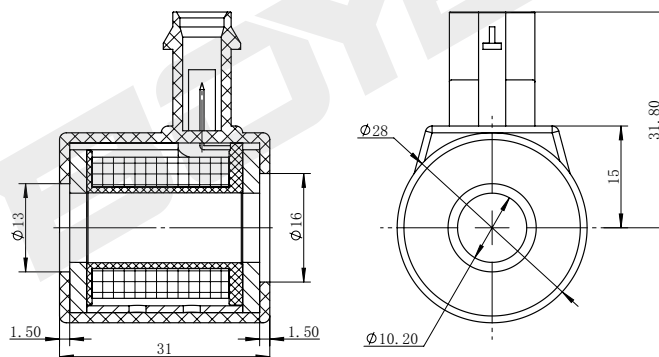

### technical parameter



|                           |    |        |                      |   |         |
|---------------------------|----|--------|----------------------|---|---------|
| Ambient temperature       | °C | -25~50 | Degree of protection |   | IP67    |
| Voltage fluctuation range | %  | 85~110 | Power on duration    | % | 100     |
| Rated power               | W  | 17     | Insulation class     |   | H (180) |

**DC 24V**

**AC 220V**

Other can be customized

## BYC18-13-01L

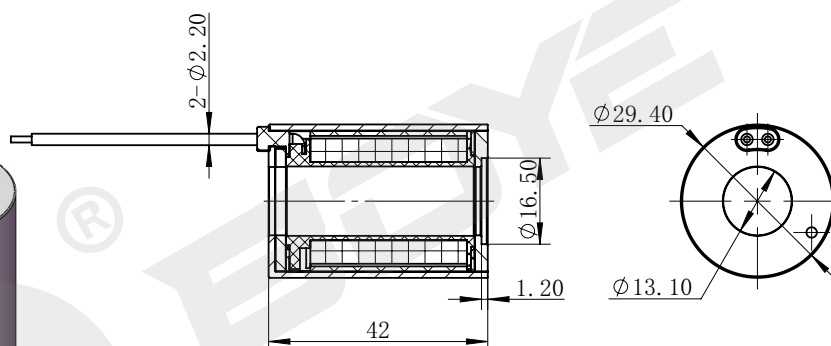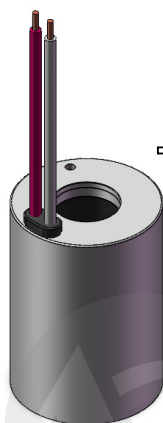

### technical parameter

|                           |    |        |                      |   |         |
|---------------------------|----|--------|----------------------|---|---------|
| Ambient temperature       | °C | -25~50 | Degree of protection |   | IP67    |
| Voltage fluctuation range | %  | 85~110 | Power on duration    | % | 100     |
| Rated power               | W  | 20     | Insulation class     |   | H (180) |

The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.