


# BYS09-25-01L

**DC 12V  
DC 24V**


Electromagnet for Multi-Way Valve

Other can be customized

- Applicable to solenoid multi-way valves
- Comes with return spring
- Comes with manual emergency device
- Coil full plastic sealing process



## Outline and connection dimensions

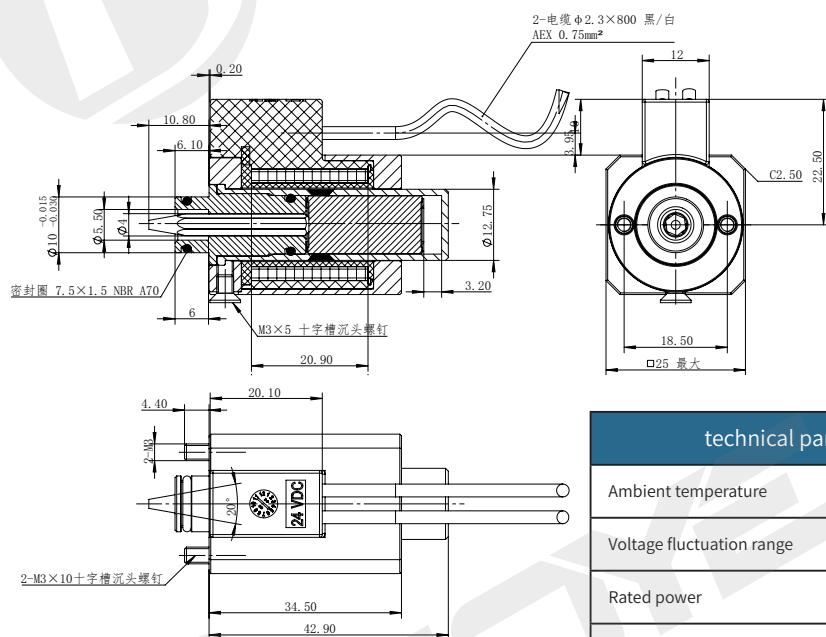

## matters needing attention

1. The coil shall not be powered on alone, which has the risk of burning!
2. Non explosion-proof coil shall not be used in medium with explosion risk!
3. After the coil is installed, it must be grounded reliably, otherwise there is a risk of electric shock !

## technical parameter

Ambient temperature	°C	-25~50
Voltage fluctuation range	%	85~110
Rated power	W	11
Rated stroke	mm	1.65
Full stroke	mm	≥ 3.2
Working oil pressure	Mpa	≤ 12
Degree of protection		IP67
Operating frequency	T/h	12000
Power on duration	%	100
Insulation class		H(180)
Electrical connection mode		Double lead wire