

# BYS10-62-01G

Electromagnet for metering pump


AC 110V  
AC 220V

Other can be customized

- Suitable for high-speed switching valves of electromagnetic diaphragm metering pumps
- Comes with return spring
- Coil full plastic sealing process



## Outline and connection dimensions

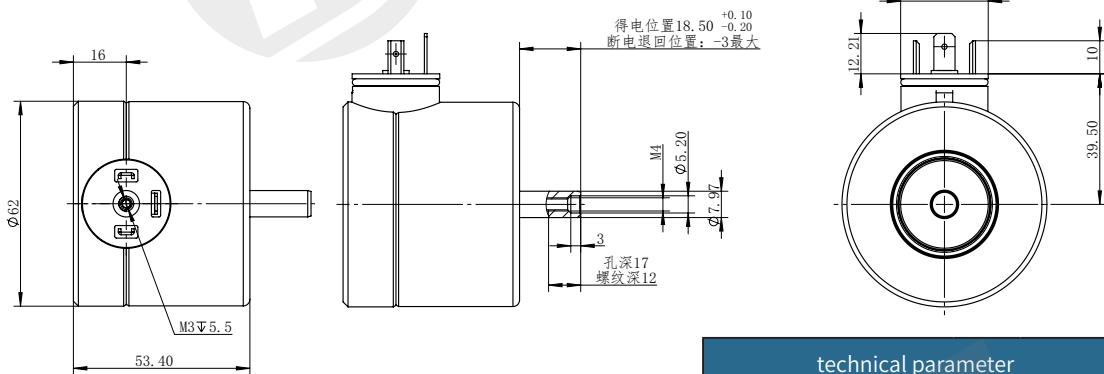

115

BYS

## matters needing attention

1. The coil shall not be powered on alone, which has the risk of burning!
2. Non explosion-proof coil shall not be used in medium with explosion risk!
3. After the coil is installed, it must be grounded reliably, otherwise there is a risk of electric shock !

technical parameter		
Ambient temperature	°C	0~40
Voltage fluctuation range	%	85~110
Rated power	W	24
Rated stroke	mm	4.5
Full stroke	mm	— —
Working oil pressure	Mpa	— —
Degree of protection		IP65
Operating frequency	T/h	21600
Power on duration	%	25
Insulation class		H(180)
Electrical connection mode		DIN43650