


BYS11-38-01D

Electromagnet for multi-way valve


- Suitable for electromagnetic multi-way valves
- Comes with return spring

**DC 12V
DC 24V**

Other can be customized

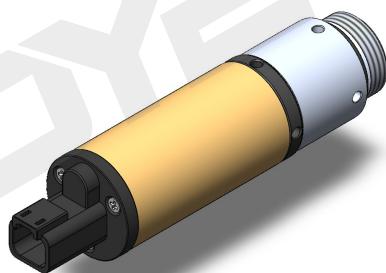

Outline and connection dimensions

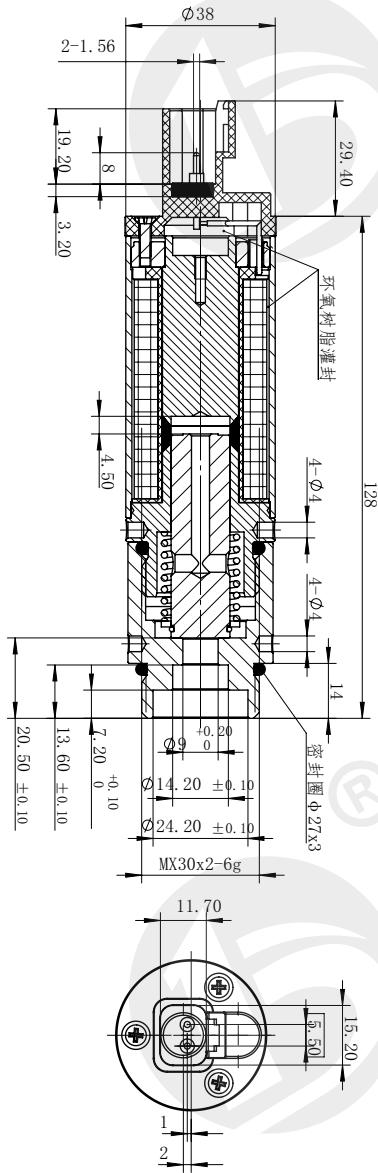

technical parameter		
Ambient temperature	°C	-25~50
Voltage fluctuation range	%	85 ~ 110
Rated power	W	56.3
Rated stroke	mm	4.5
Full stroke	mm	≥ 4.5
Working oil pressure	Mpa	≤ 20
Degree of protection		IP54
Operating frequency	T/h	12000
Power on duration	%	100
Insulation class		H(180)
Electrical connection mode		AMP 9X0.5

F-S characteristic curve

