


BYS12-35-01LD

Electromagnet for multi-way valve


- Suitable for electromagnetic multi-way valves
- Comes with return spring
- Coil full plastic sealing process

**DC 12V
DC 24V**

Other can be customized

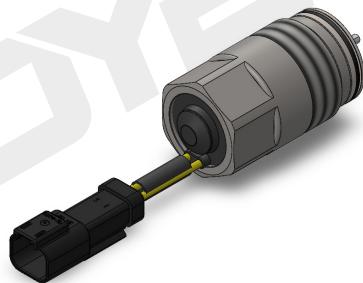


Outline and connection dimensions

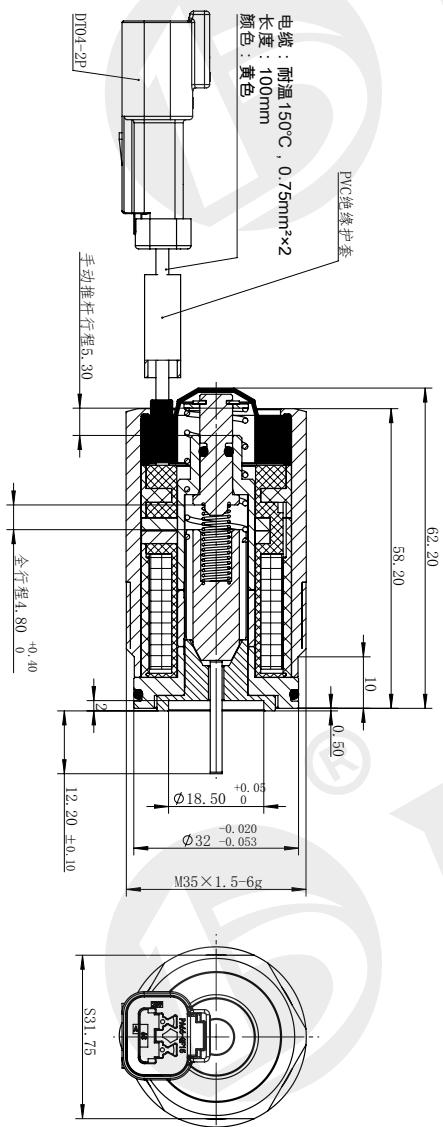

technical parameter

Ambient temperature	°C	-25~50
Voltage fluctuation range	%	85 ~ 110
Rated power	W	18
Rated stroke	mm	—
Full stroke	mm	≥ 5
Working oil pressure	Mpa	≤ 21
Degree of protection		IP67
Operating frequency	T/h	12000
Power on duration	%	100
Insulation class		H(180)
Electrical connection mode		双引线 +DT04-2P

F-S characteristic curve

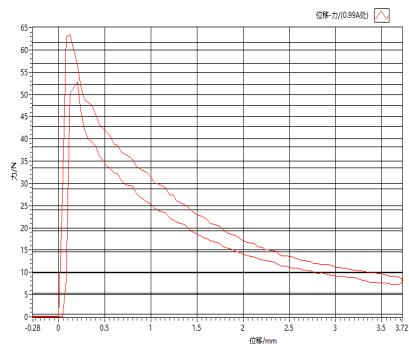

The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.